

SERIES AP 500

MINI REGULATOR

Ultra Compact / Ultra Clean



- Single stage
- Surface mount (IGS)
1-1/8 inch C and W seal
- Stainless steel 316L
VAR secondary remelt
construction
- Compact size with low
internal volume
- High performance with
low hysteresis
- Vacuum to 3,000 psig
(207 bar) inlet
- 15 slpm flow capacity
HF option to 30 slpm
- Sub-atmospheric to low
positive pressure delivery[‡]
- Installation and operating
instructions available at
www.aptech-online.com
in the Tech Briefs section

Operating Parameters

Source pressure	AP 500	vacuum to 150 psig (10 bar)
	AP 500 HR	vacuum to 3,000 psig (207 bar)
Delivery pressure	AP 501A	100 mm Hg absolute to 10 psig (0.7 bar)*
	AP 502	0.5 to 30 psig (0.034 to 2 bar)
	AP 506	1 to 60 psig (0.07 to 4 bar)
	AP 510	1 to 100 psig (0.07 to 7 bar)
	AP 515	2 to 150 psig (0.14 to 10 bar)*
Proof pressure		1.5 times operating pressure
Burst pressure		3 times operating pressure

*501A not available with HR option, 515 only available with HR option.

Other Parameters

Inlet/outlet connectors	1/4 or 3/8 inch face seal or tube weld 1-1/8 inch C and W seal
Flow coefficient (Cv)	0.06 (0.1 HF option)
Internal volume	0.15 in ³ (2.4 cm ³)
Operating temperature	-40° to +160°F (-40° to +71°C)**
Surface finish	15 µin Ra max / 10 µin. Ra avg. (0.4/0.25 µm) standard; 10 µin (0.25 µm); 7 µin (0.18 µm); and 5 µin (0.13 µm) Ra max optional
Inboard leakage	2 x 10 ⁻¹⁰ sccs
Outboard leakage	2 x 10 ⁻⁹ sccs He at 100 psig inlet pressure
Leakage across seat	4 x 10 ⁻⁸ sccs He at 100 psig inlet pressure
Supply pressure effect	0.20 psig per 20 psig source pressure change (0.4 psig per 20 psig source pressure change HF option)
Installation	Surface

**HR option limited to -20° to 120°F (-28° to 48°C)

Materials

	Series AP 500 S Noncorrosive	Series AP 500 SH Corrosive
Type of Service		
Wetted Parts		
Body	SS 316L secondary remelt	SS 316L secondary remelt
Poppet/diaphragm	SS 316L / Ni-Co alloy / UNS R30003	Ni-Cr-Mo alloy / UNS N06022 / Ni-Co alloy / UNS R30003
Finish	electropolished and passivated	electropolished and passivated
Seat	PCTFE (Polyimide*** and PTFE optional)	PCTFE (PTFE optional)


[‡]Absolute pressure not available with HF option.

***Polyimide not available with HF option.

All specifications subject to change without notice.




SERVICE AND SUPPORT BEYOND COMPARE

DIMENSIONAL INFORMATION

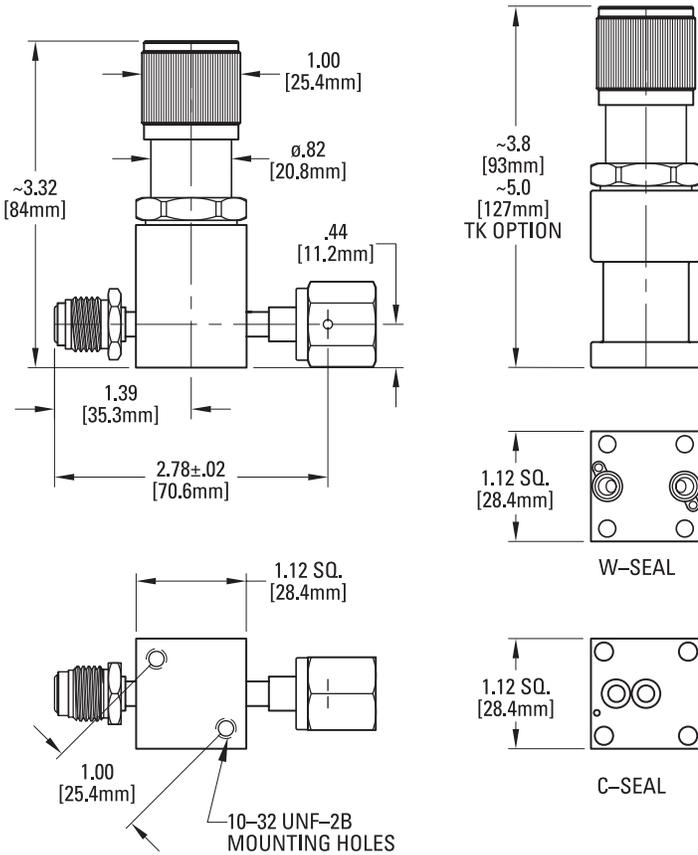

All dimensions in inches (mm). Metric dimensions are for reference only.

PORTING CONFIGURATIONS

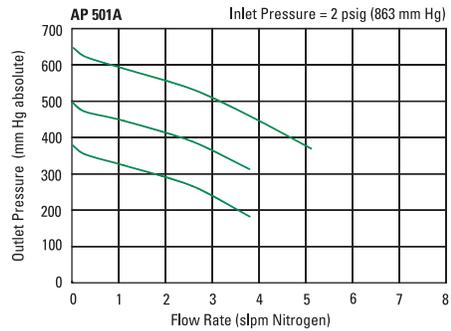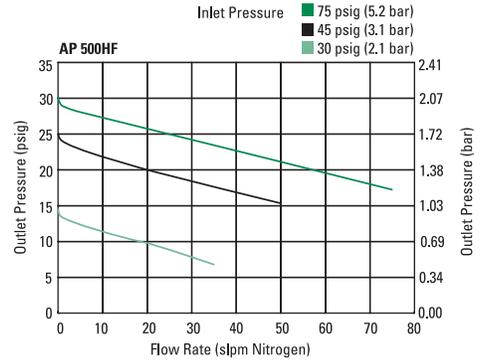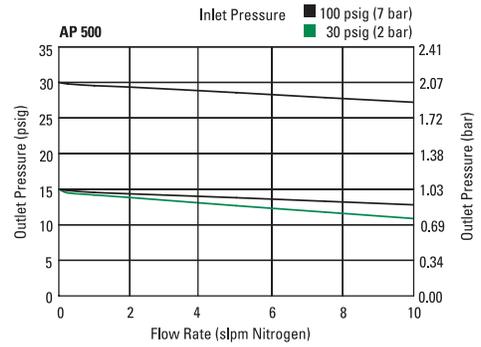

CAUTION: Product selection is the sole responsibility of the user, regardless of any recommendations or suggestions made by the factory. The user shall make selections based upon their own analysis and testing with regard to function, material compatibility and product ratings. Proper installation, operation and maintenance are also required to assure safe, trouble free performance.

ORDERING INFORMATION

Sample Order Number

AP 502SM 2PW FV4 FV4

AP 502 | Series

AP 501 = 0.5-10 psig (0.034 to 0.7 bar)
 AP 502 = 0.5-30 psig (0.034 to 2 bar)
 AP 506 = 1-60 psig (0.07 to 4 bar)
 AP 510 = 1-100 psig (0.07 to 7 bar)
 AP 515 = 2-150 psig (0.14 to 10 bar)***

S | Material

S = Stainless steel (SS)
 SH = SS / Ni-Cr-Mo alloy internals

M | Surface Finish Options

M = 10 μin. Ra max
 V = 7 μin. Ra max
 X = 5 μin. Ra max

Range Options

A = 100 mm Hg absolute to 10 psig (AP 501 only, not available HR)

2PW | Ports

2PW = 2 ports welded
 2P = 2 ports IGS (W or C seal only)

Consult factory for other porting options.

FV4 FV4 | Connections Inlet / Outlet

FV4 = 1/4 inch face seal female
 MV4 = 1/4 inch face seal male
 FUJ/7* = W seal 1-1/8 inch
 FA* = C seal 1-1/8 inch

3/8" connections or tube weld available.
 *FUJ and FA are only listed once in model number, not twice like a fitting.

Options

VS = Polyimide seat**
 HF = High flow**
 TF = PTFE seat
 FI = Friction dampener, non-wetted
 TK = Tall knob
 HR = High inlet pressure option***

**HF option not available with VS option or for absolute (A).
 ***HR not available with HF or TF options.
 515 only available with HR option.

AP Tech has product options and variations which are not documented in data sheets. If you have a model number that is not defined by the ordering information, please consult the factory or your local representative.