

Measurement solutions for **semiconductor,** **solar, light**



 Part of your business



Alexander Wiegand,
Chairman and CEO WIKA

About us

As a family-run business acting globally, with over 9,300 highly qualified employees, the WIKA group of companies is a worldwide leader in pressure and temperature measurement. The company also sets the standard in the measurement of level and flow, and in calibration technology.

Founded in 1946, WIKA is today a strong and reliable partner for all the requirements of industrial measurement technology, thanks to a broad portfolio of high-precision instruments and comprehensive services.

With manufacturing locations around the globe, WIKA ensures flexibility and the highest delivery performance. Every year, over 50 million quality products, both standard and customer-specific solutions, are delivered in batches of 1 to over 10,000 units.

With numerous wholly owned subsidiaries and partners, WIKA competently and reliably supports its customers worldwide. Our experienced engineers and sales experts are your competent and dependable contacts locally.

Content

WIKA know-how		Facilities support equipment	
Design and materials	04	Exhaust and abatement monitoring	12
Testing, packaging and preservation	05	Installation and testing	13
Certificates and approvals	06	Process cooling water	14
Process gas management		CDA & pneumatics & general purity gas sticks	15
Gauges and switches	08	WIKA worldwide	16
Diaphragm gauges	09		
Ultra High Purity pressure transducers	10		
Displays and scales	11		

WIKA – your partner for semiconductor, solar and light-emitting technologies

WIKA's UHP gauge and transducer product lines offer customers in the semiconductor, photovoltaic and flat panel display industries a comprehensive portfolio of pressure measurement solutions for gas delivery systems of the highest purity requirements.


WIKA products are utilized in applications supporting gas tank farms, specialty gas cylinders, point of use panels to chip production tool chambers. With water-tight integrity to IP67 and NEMA4, products can be used in various application scenarios.

In keeping with the industry's most critical purity requirements, WIKA's UHP products are manufactured in certified clean room environments and are cleaned and packaged to SEMI standards – delivered ready for service in certified clean work floor areas.

A team of development engineers provide customized designs to meet customer-specific applications and requirements.

Comprehensive quality control and engineering efforts ensure that every WIKA instrument is built to last.

Design and materials

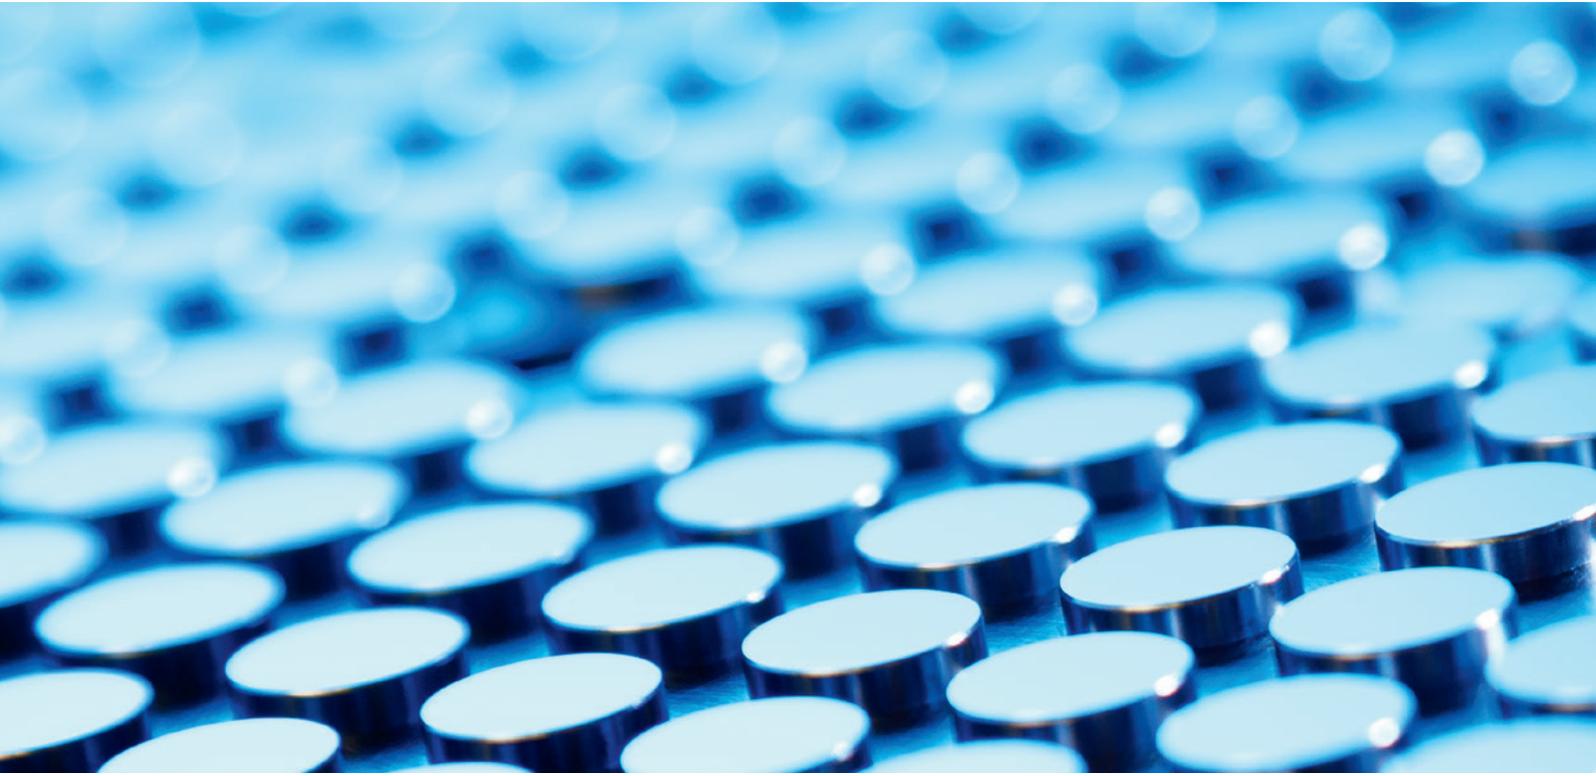



WIKA's High Purity and Ultra High Purity products are designed to the rigorous standards and recommendations relevant to the semiconductor market and its governing agencies. UHP Bourdon tube pressure gauges have electro-polished internal surfaces and are the standard gauge of gas distribution systems installed in semiconductor FABs.

The Bourdon tube UHP gauge series is complemented by a diaphragm-based UHP gauge offering the smallest possible dead space and shortest purge cycle times.

WIKA's UHP pressure transducers are electronic instruments of the smallest footprint meeting the most compact design of gas cabinets or valve manifold panels for installation in continuously shrinking space requirements found in modern chip FABs.

A patented design provides the semiconductor industry with the only true vacuum-referenced, non-capacitance based UHP pressure transducer in the market serving advanced pressure measurement requirements for gas distribution and point of use on chip tools based on WIKA's proven monolithic thin-film pressure sensor technology.

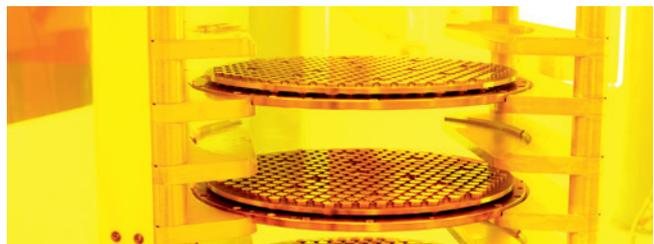

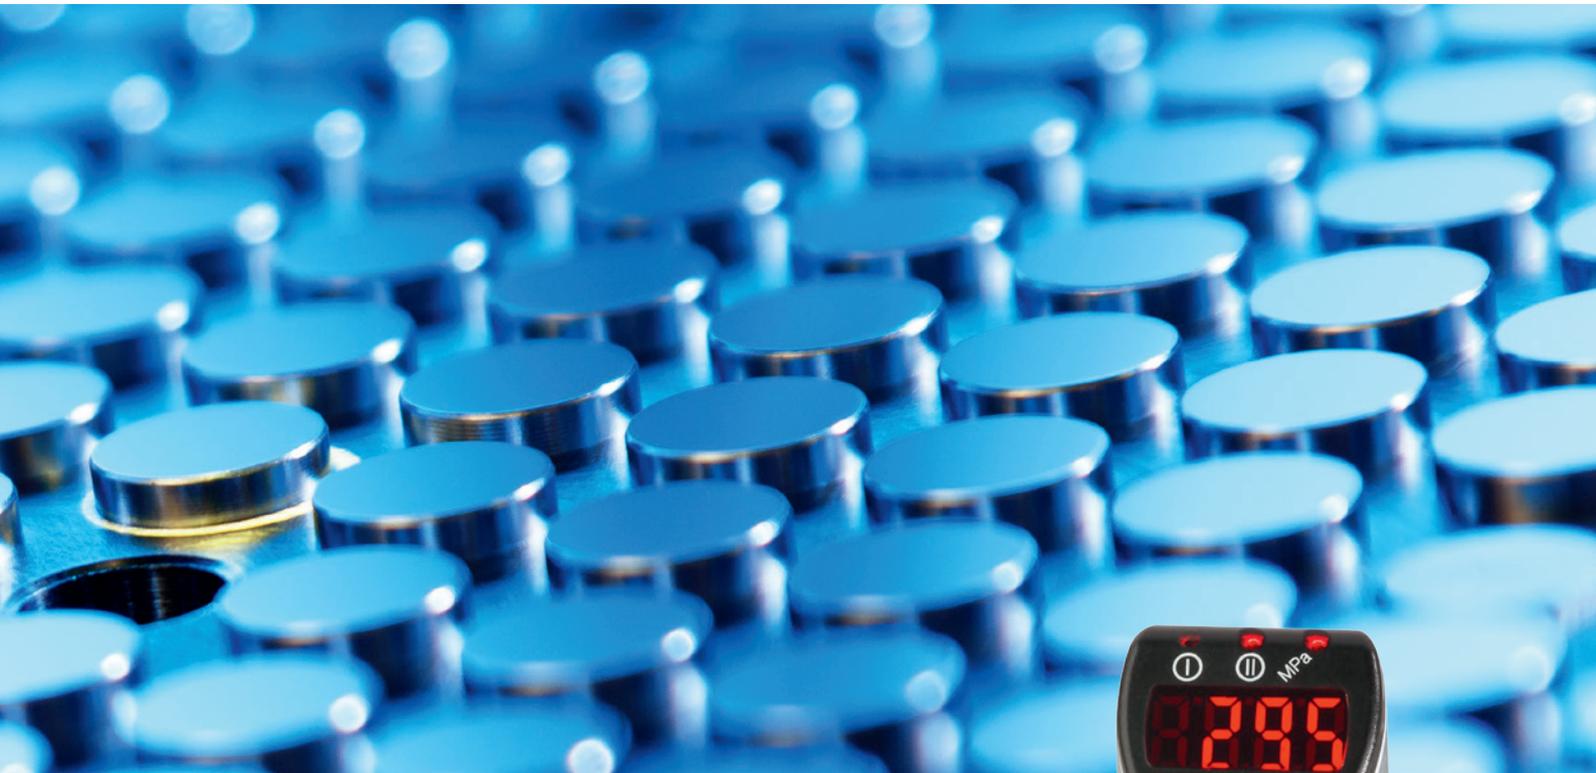

All media-wetted surfaces are designed to comply with SEMI standards and are compatible with semiconductor flammable, toxic and corrosive gases. While all reputable manufacturers comply with SEMI specifications, WIKA products go one step further incorporating technology with customer preference into every design. By allowing to elect wetted surface area materials comprised of 316L double-melt stainless steel or proprietary VIM/VAR materials, WIKA customers may select the products that are best for their projects.


The accuracy of all WIKA products is reported in accordance with national ASME and international IEC standards to address industry expectations for non-linearity, hysteresis, non-repeatability and reproducibility.

Testing, packaging and preservation



In order to comply with the High Purity and Ultra High Purity (UHP) requirements of the semiconductor industry, WIKA UHP and HP products are cleaned, packaged and preserved in accordance with SEMI specifications. All UHP products are 100% helium leak tested to 1×10^{-9} scc/sec (inboard) in an ISO class 6 cleanroom or better.

Ensuring continued SEMI conforming quality of UHP products and manufacturing processes, WIKA assigns periodic analytical assessments carried out by RJ Lee Group, Inc. using analytical methods corresponding to SEMI F72 and SEMATECH 91060573B (AES), SEMATECH 90120403B (XPS) and SEMATECH 90120401B and SEMI F73 (SEM).

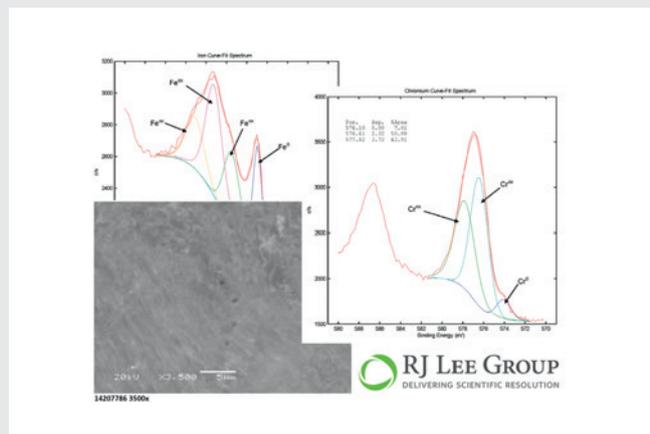

Certificates and approvals



Given the increasing demands in terms of quality and product safety, WIKA offers a wide range of approvals and certificates to best meet customer expectations and regulatory compliances. For non-incendiary applications, WIKA offers a host of US, European and international approvals.



Gauges and switches

Ultra High Purity Bourdon tube gauge

230.15, 230.25



The 230.15 is the right choice for specialty gas, Ultra High Purity, PV and SEMI applications in gas distribution systems using face-seal connections. The 230.25 is best suited for applications that insist on VIM/VAR wetted parts and face-seal connections. Both product types have electropolished media-wetted stainless steel surfaces, as well as electropolished stainless steel cases.

- Nominal size: 2" (53 mm), 1½" (40 mm)
- Scale range: Vacuum / compound and positive pressure ranges
- Accuracy class: 2": Grade A per ASME B40.1, 1½": Grade B per ASME B40.1 (other accuracy classes upon request)
- Data sheet: PM 02.20

Indicating UHP pressure switch gauge

230.15, 230.25 with 851.3(3)




The 230.15 and 230.25 series are complemented by a reed switch option allowing for monitoring pressure levels by electrical alert output. The WIKA switch option offers normally open (NO) and normally closed (NC) functionality in one single instrument.

- Nominal size: 2" (53 mm), 1½" (40 mm)
- Scale range: Vacuum / compound and positive pressure ranges
- Accuracy class: 2": Grade A per ASME B40.1, 1½": Grade B per ASME B40.1 (other accuracy classes upon request)
- Data sheet: PV 22.05

Functional diagram

Reed contact SPDT (changeover) not actuated

C = common
NC = normally closed
NO = normally open

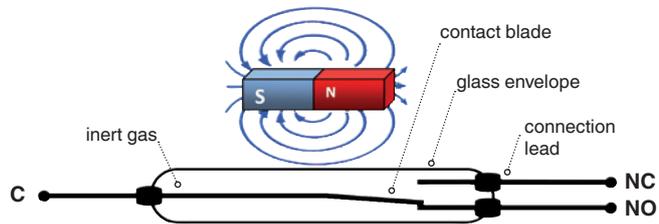

WIKA also offers a dual switch option for monitoring two pressure levels (e.g. upper and lower). This product addresses applications such as dual containment tubing installation.

High Purity Bourdon tube gauge

130.15



The 130.15 series is designed for specialty gas installations where High Purity gas distribution systems are assembled using NPT connections.

- Nominal size: 2" (53 mm), 1½" (40 mm)
- Scale range: Vacuum / compound and positive pressure ranges
- Accuracy class: 2": Grade A per ASME B40.1, 1½": Grade B per ASME B40.1 (other accuracy classes upon request)
- Data sheet: PM 02.19

Diaphragm gauges

Diaphragm gauges are the perfect mechanical pressure gauge for low-pressure, point-of-use applications. The gauge's design reduces particle generation and decreases dry-down times.

UHP Flow-Through-Gauge

432.25



Sensitive installations, such as hook-up in chip fabs, require a specific focus on particle prevention. Using a flow-through gauge in a GDS eliminates any dead space and shortens purge cycles after installation or maintenance.

- Nominal size: 2" (53 mm), 1½" (40 mm), 1 1/8" (28 mm)
- Scale range: -1 ... 4 bar / -30 inHg ... 60 psi,
-1 ... 9 bar / -30 inHg ... 130 psi
- Accuracy class: Grade B per ASME B40.1,
(other accuracy classes upon request)
- Data sheet: PM 04.12

UHP mini diaphragm gauge

432.15 1.3"




Gas distribution systems on chip production tools combine the need for excellent Ultra High Purity class, as well as smallest space requirement. These applications are addressed by the mini diaphragm gauges (MDG)

- Nominal size: 1.3" (33 mm)
- Scale range: -1 ... 4 bar / -30 inHg ... 60 psi,
-1 ... 9 bar / -30 inHg ... 130 psi,
-30 inHg ... 160 psi,
0 ... 160 psi
- Accuracy class: Grade B per ASME B40.1,
(other accuracy classes upon request)
- Data sheet: PM 04.18

432.10 1"



- Nominal size: 1" (25.4 mm)

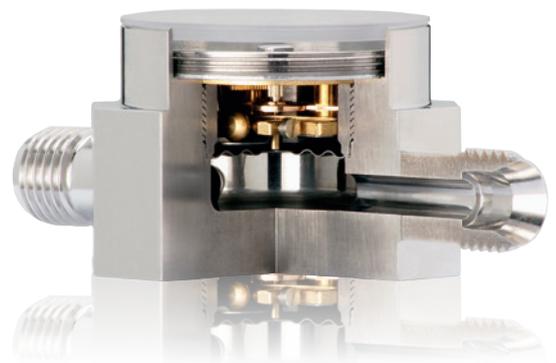

Ultra High Purity pressure transducers

True vacuum reference

WU-20, WU-25, WU-26



The WU-2 series transducer combines state-of-the-art digital transducer concepts with analogue-like output signals to provide the safest and most accurate pressure measurements necessary for today's demanding market requirements.

- Accuracy class: $\leq 0.15\%$ RSS ($\leq 0.3\%$ FS per IEC 61298-2)
- Measuring range: 15 ... 5,000 psi / 1 ... 360 bar (further pressure units available), Vacuum, compound, absolute, gauge
- Special feature: 4 ... 20 mA, DC 0 ... 5 V, DC 0 ... 10 V, Vacuum reference, NEMA 4, IP67, Manual zero point setting
- Data sheet: PE 87.07



Compact

WUC-10, WUC-15, WUC-16



The most compact design of the WUC series transducer meets the smallest product footprint requirements. The space-saving design makes it the perfect fit for new, as well as retrofit projects.

- Accuracy class: $\leq 0.20\%$ FS RSS ($\leq 0.5\%$ FS per IEC 61298-2)
- Measuring range: 15 ... 5,000 psi / 1 ... 360 bar (further pressure units available), Vacuum, compound, absolute, gauge
- Special feature: 4 ... 20 mA, DC 0 ... 5 V, DC 0 ... 10 V, Vacuum reference, NEMA 4, IP67, Manual zero point setting
- Data sheet: PE 87.06



Integrated display & switch

WUD-20, WUD-25, WUD-26



The WUD-2x incorporates a local, rotatable, and programmable display with the state-of-the-art electronics of the WU-2x. The WUD-2x transducer with integrated display provides a local reading of the process pressure measurement as well as the associated analogue output signal (current or voltage) from the transducer.

- Nominal size: $\leq 0.20\%$ FS RSS ($\leq 0.5\%$ FS per IEC 61298-2)
- Scale range: 15 ... 5,000 psi / 1 ... 360 bar (further pressure units available), Vacuum, compound, absolute, gauge
- Accuracy class: 4 ... 20 mA, DC 0 ... 5 V, DC 0 ... 10 V, Vacuum reference, NEMA 4, IP67, Manual zero point setting, Optional 2 switching outputs (NPN)
- Data sheet: PE 87.08

Optional alarm contacts are available for programming up to two user-defined switch points



Displays and scales

Remote digital display

DI30



- Input: Standard signals
- Alarm output: 2 relays
- Special feature: Transmitter power supply, Wall mounting (optional)
- Power supply: AC 230 V oder AC 115 V
- Data sheet: AC 80.05

Gas cylinder scale Specialty gas filling level control

GCS-1



Cylinder scales are engineered and designed for liquid delivery sources used in both indoor and outdoor hazardous and non-hazardous applications

- Nominal size: $\leq 0.1\%$ FS
- Measuring range: 0 ... 60 lbs (0 ... 27.22 kg),
0 ... 100 lbs (0 ... 45.36 kg),
0 ... 300 lbs (0 ... 136.08 kg)
- Special feature: 4 ... 20 mA, DC 0 ... 5 V, DC 0 ... 10 V, IP65
- Data sheet: PE 87.19



For wet chemistry supply in semiconductor production systems, please refer to our specialised products Hydra-Dry, Hydra-Gauge and Hydra-Sensor



Exhaust and abatement monitoring

Differential pressure sensor

A2G-50



- Output signal: 0 ... 10 V (3-wire),
4 ... 20 mA (3-wire)
- Measuring range: 100 ... 2,500 Pa
- Accuracy class: $\pm 1.5\%$ +1 Pa of reading
- Ingress protection: IP54
- Data sheet: PE 88.02

ERC

Pressure sensor for general industrial applications

A-10



- Non-linearity (\pm % of span): ≤ 0.25 or 0.5 BFSL
- Measuring range: 0 ... 0.05 to 0 ... 1,000 bar,
0 ... 0.1 to 0 ... 25 bar abs.,
-0.025 ... +0.025 to -1 ... +24 bar
- Special feature: Compact design,
Free test certificate
- Data sheet: PE 81.60

UL ENEC GL

Superior pressure sensor for general industrial applications

S-20



- Non-linearity (\pm % of span): ≤ 0.125 or 0.5 BFSL
- Measuring range: 0 ... 0.4 to 0 ... 1,600 bar,
0 ... 0.4 to 0 ... 40 bar abs.,
-1 ... 0 to -1 ... +59 bar
- Special feature: Extreme operating conditions,
Customer-specific variants,
Free test certificate
- Data sheet: PE 81.61

UL ENEC GL

Installation and testing

UHP high-accuracy test gauge

332.54-UHP



The 332.54-UHP is a high-accuracy "Inspector's Test Gauge" used to qualify equipment installations serving UHP upstream source and point-of-use applications within semiconductor fabrication facilities.

- Nominal size: 4" (100 mm)
- Scale range: -1 ... 1 bar / -30 inHg ... 15 psi,
-1 ... 360 bar / -30 inHg ... 5,000 psi
- Accuracy class: -30 inHg ... 600 psi: $\pm 0.25\%$ FS (ASME B40.1 Grade 3A),
600 ... 2,000 psi: $\pm 0.5\%$ of span (ASME B40.1 Grade 2A),
2,000 ... 5,000 psi: $\pm 0.25\%$ of span (ASME B40.1 Grade 3A)
- Data sheet: 332.54-UHP

Pneumatic hand pump

CPP7-H



- Pressure range: -0,8 ... +7 bar
-11,6 ... 101,5 psi
- Medium: Ambient air
- Special feature: Pressure and vacuum generation switchable,
Low weight,
Compact dimensions
- Data sheet: CT 91.02



Process cooling water

Bimetal thermomanometer

100.02.063



- Nominal size: 63, 80 mm
- Scale range: Pressure: 0 ... 1 to 0 ... 16 bar,
Temperature: 0 ... 100 to 0 ... 150 °C
- Accuracy class: Pressure: 2.5 (EN 837-1),
Temperature: 2.5 °C
- Data sheet: PM 01.23

Process cooling water gauge

232.53



- Nominal size: 2" (53 mm), 2½" (63 mm), 4" (100 mm)
- Scale range: -1 ... 16 bar / -30 inHg ... 200 psi,
0 ... 1,000 bar / 0 ... 15,000 psi
- Accuracy class: 2" & 2½": Grade A per ASME B40.1,
4": Grade 1A per ASME B40.1
- Data sheet: 23X.53



CDA & pneumatics & general purity gas sticks

Welding gauge

111.11



- Nominal size: 1½" (40 mm), 2" (50 mm), 2½" (63 mm)
- Scale range: 0 ... 0.6 to 0 ... 400 bar
- Accuracy class: 2.5
- Data sheet: PM 01.03



Pressure gauge, stainless steel

131.11



- Nominal size: 1½" (40 mm), 2" (50 mm), 2½" (63 mm)
- Scale range: NS 40 and 50: 0 ... 1 to 0 ... 600 bar, NS 63: 0 ... 1 to 0 ... 1,000 bar
- Accuracy class: 2.5
- Data sheet: PM 01.05



Utility Gauge, lower mount and centre back mount

111.10, 111.12



- Nominal size: 1½" (40 mm), 2" (50 mm), 2½" (63 mm), 4" (100 mm)
- Scale range: 0 ... 400 bar
- Accuracy class: 2.5
- Data sheet: PM 01.01



WIKA worldwide

Europe

Austria

WIKA Messgerätevertrieb
Ursula Wiegand GmbH & Co. KG
Perfektastr. 73
1230 Vienna
Tel: +43 1 8691631
Fax: +43 1 8691634
info@wika.at
www.wika.at

Belarus

WIKA Belarus
WIKA Instrumentation De Berk
Industrial estate De Berk
Newtonweg 12
6101 WX Echt
Tel: +31 475 535500
Fax: +31 475 535446
info@wika.nl
www.wika.nl

Benelux

WIKA Benelux
Industrial estate De Berk
Newtonweg 12
6101 WX Echt
Tel: +31 475 535500
Fax: +31 475 535446
info@wika.nl
www.wika.nl

Bulgaria

WIKA Bulgaria EOOD
Akad.Ivan Geshov Blvd. 2E
Business Center Serdika, office 3/104
1330 Sofia
Tel: +359 2 82138-10
Fax: +359 2 82138-13
info@wika.bg
www.wika.bg

Croatia

WIKA Croatia d.o.o.
Hrastovicka 19
10250 Zagreb-Lucko
Tel: +385 1 6531-034
Fax: +385 1 6531-357
info@wika.hr
www.wika.hr

Finland

WIKA Finland Oy
Melkonkatu 24
00210 Helsinki
Tel: +358 9 682492-0
Fax: +358 9 682492-70
info@wika.fi
www.wika.fi

France

WIKA Instruments s.a.r.l.
Immeuble Le Trident
38 avenue du Gros Chêne
95220 Herblay
Tel: +33 1 787049-46
Fax: +33 1 787049-59
info@wika.fr
www.wika.fr

Germany

WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Str. 30
63911 Klingenberg
Tel: +49 9372 132-0
Fax: +49 9372 132-406
info@wika.de
www.wika.de

Italy

WIKA Italia S.r.l. & C. S.a.s.
Via G. Marconi 8
20020 Arese (Milano)
Tel: +39 02 93861-1
Fax: +39 02 93861-74
info@wika.it
www.wika.it

Poland

WIKA Polska spółka z ograniczoną
odpowiedzialnością sp. k.
Ul. Legska 29/35
87-800 Wloclawek
Tel: +48 54 230110-0
Fax: +48 54 230110-1
info@wikapolska.pl
www.wikapolska.pl

Romania

WIKA Instruments Romania S.R.L.
050897 Bucuresti
Calea Rahovei Nr. 266-268
Corp 61, Etaj 1
Tel: +40 21 4048327
Fax: +40 21 4563137
info@wika.ro
www.wika.ro

Russia

AO WIKA MERA
Wjatskaya Str. 27, Building 17
Office 205/206
127015 Moscow
Tel: +7 495-648018-0
Fax: +7 495-648018-1
info@wika.ru
www.wika.ru

Serbia

WIKA Merna Tehnika d.o.o.
Sime Solaje 15
11060 Beograd
Tel: +381 11 2763722
Fax: +381 11 753674
info@wika.rs
www.wika.rs

Spain

Instrumentos WIKA S.A.U.
C/Josep Carner, 11-17
08205 Sabadell Barcelona
Tel: +34 933 9386-30
Fax: +34 933 9386-66
info@wika.es
www.wika.es

Switzerland

MANOMETER AG
Industriestrasse 11
6285 Hitzkirch
Tel: +41 41 91972-72
Fax: +41 41 91972-73
info@manometer.ch
www.manometer.ch

Turkey

WIKA Instruments Istanbul
Basinc ve Sicaklik Ölçme Cihazlari
lth. lhr. ve Tic. Ltd. Sti.
Bayraktar Bulvari No. 17
34775 Yukari Dudullu - Istanbul
Tel: +90 216 41590-66
Fax: +90 216 41590-97
info@wika.com.tr
www.wika.com.tr

Ukraine

TOV WIKa Prylad
M. Raskovoy Str. 11, A
PO 200
02660 Kyiv
Tel: +38 044 4968380
Fax: +38 044 4968380
info@wika.ua
www.wika.ua

United Kingdom

WIKA Instruments Ltd
Merstham, Redhill RH13LG
Tel: +44 1737 644-008
Fax: +44 1737 644-403
info@wika.co.uk
www.wika.co.uk

North America

Canada

WIKA Instruments Ltd.
Head Office
3103 Parsons Road
Edmonton, Alberta, T6N 1C8
Tel: +1 780 4637035
Fax: +1 780 4620017
info@wika.ca
www.wika.ca

USA

WIKA Instrument, LP
1000 Wiegand Boulevard
Lawrenceville, GA 30043
Tel: +1 770 5138200
Fax: +1 770 3385118
info@wika.com
www.wika.com

Gayesco-WIKA USA, LP
229 Beltway Green Boulevard
Pasadena, TX 77503
Tel: +1 713 47500-22
Fax: +1 713 47500-11
info@wikahouston.com
www.wika.us

Mensor Corporation
201 Barnes Drive
San Marcos, TX 78666
Tel: +1 512 396-4200
Fax: +1 512 396-1820
sales@mensor.com
www.mensor.com

Latin America

Argentina

WIKA Argentina S.A.
Gral. Lavalle 3568
(B1603AUH) Villa Martelli
Buenos Aires
Tel: +54 11 47301800
Fax: +54 11 47610050
info@wika.com.ar
www.wika.com.ar

Brazil

WIKa do Brasil Ind. e Com. Ltda.
Av. Ursula Wiegand, 03
18560-000 Iperó - SP
Tel: +55 15 3459-9700
Fax: +55 15 3266-1196
vendas@wika.com.br
www.wika.com.br

Chile

WIKa Chile S.p.A.
Av. Coronel Pereira 72
Oficina 101
Las Condes - Santiago de Chile
Tel: +56 2 2209-2195
info@wika.cl
www.wika.cl

Colombia

Instrumentos WIKa Colombia S.A.S.
Avenida Carrera 63 # 98 - 25
Bogotá - Colombia
Tel: +57 1 624 0564
info@wika.co
www.wika.co

Mexico

Instrumentos WIKa Mexico
S.A. de C.V.
Viena 20 Ofna 301
Col. Juarez, Del. Cuauhtemoc
06600 Mexico D.F.
Tel: +52 55 50205300
Fax: +52 55 50205300
ventas@wika.com
www.wika.mx

Asia

Azerbaijan

WIKa Azerbaijan LLC
Caspian Business Center
9th floor 40 J.Jabbarli str.
AZ1065 Baku
Tel: +994 12 49704-61
Fax: +994 12 49704-62
info@wika.az
www.wika.az

China

WIKa Instrumentation Suzhou Co., Ltd.
81, Ta Yuan Road, SND
Suzhou 215011
Tel: +86 512 6878 8000
Fax: +86 512 6809 2321
info@wika.cn
www.wika.com.cn

India

WIKa Instruments India Pvt. Ltd.
Village Kesnand, Wagholi
Pune - 412 207
Tel: +91 20 66293-200
Fax: +91 20 66293-325
sales@wika.co.in
www.wika.co.in

Iran

WIKa Instrumentation Pars Kish
(KFZ) Ltd.
Apt. 307, 3rd Floor
8-12 Vanak St., Vanak Sq., Tehran
Tel: +98 21 88206-596
Fax: +98 21 88206-623
info@wika.ir
www.wika.ir

Japan

WIKa Japan K. K.
MG Shibaura Bldg, 6F
1-8-4, Shibaura, Minato-ku
Tokyo 105-0023
Tel: +81 3 5439-6673
Fax: +81 3 5439-6674
info@wika.co.jp
www.wika.co.jp

Kazakhstan

TOO WIKa Kazakhstan
Microdistrict 1, 50/2
050036 Almaty
Tel: +7 727 225-94-44
Fax: +7 727 225-97-77
info@wika.kz
www.wika.kz

Korea

WIKa Korea Ltd.
39 Gajangsaneopseo-ro Osan-si
Gyeonggi-do 447-210
Tel: +82 2 86905-05
Fax: +82 2 86905-25
info@wika.co.kr
www.wika.co.kr

Malaysia

WIKa Instrumentation (M) Sdn. Bhd.
No. 23, Jalan Jurukur U1/19
Hicom Glenmarie Industrial Park
40150 Shah Alam, Selangor
Tel: +60 3 5590 6666
info@wika.my
www.wika.my

Philippines

WIKa Instruments Philippines Inc.
Ground Floor, Suite A
Rose Industries Building
#11 Pioneer St., Pasig City
Philippines 1600
Tel: +63 2 234-1270
Fax: +63 2 654-9662
info@wika.ph
www.wika.ph

Singapore

WIKa Instrumentation Pte. Ltd.
13 Kian Teck Crescent
628878 Singapore
Tel: +65 6844 5506
Fax: +65 6844 5507
info@wika.sg
www.wika.sg

Taiwan

WIKa Instrumentation Taiwan Ltd.
Min-Tsu Road, Pinjen
32451 Taoyuan
Tel: +886 3 420 6052
Fax: +886 3 490 0080
info@wika.tw
www.wika.tw

Thailand

WIKa Instrumentation Corporation
(Thailand) Co., Ltd.
850/7 Ladkrabang Road, Ladkrabang
Bangkok 10520
Tel: +66 2 32668-73
Fax: +66 2 32668-74
info@wika.co.th
www.wika.co.th

Africa / Middle East

Egypt

WIKa Near East Ltd.
Villa No. 6, Mohamed Fahmy
Elmohdar St. - of Eltayaran St.
1st District - Nasr City - Cairo
Tel: +20 2 240 13130
Fax: +20 2 240 13113
info@wika.com.eg
www.wika.com.eg

Namibia

WIKa Instruments Namibia Pty Ltd.
PO. Box 31263
Pionierspark
Windhoek
Tel: +26 4 61238811
Fax: +26 4 61233403
info@wika.com.na
www.wika.com.na

South Africa

WIKa Instruments Pty. Ltd.
Chilvers Street, Denver
Johannesburg, 2094
Tel: +27 11 62100-00
Fax: +27 11 62100-59
sales@wika.co.za
www.wika.co.za

United Arab Emirates

WIKa Middle East FZE
Warehouse No. RB08JB02
P.O. Box 17492
Jebel Ali, Dubai
Tel: +971 4 883-9090
Fax: +971 4 883-9198
info@wika.ae
www.wika.ae

Australia

Australia

WIKa Australia Pty. Ltd.
Unit K, 10-16 South Street
Rydalmere, NSW 2116
Tel: +61 2 88455222
Fax: +61 2 96844767
sales@wika.com.au
www.wika.com.au

New Zealand

WIKa Instruments Limited
Unit 7 / 49 Sainsbury Road
St Lukes - Auckland 1025
Tel: +64 9 8479020
Fax: +64 9 8465964
info@wika.co.nz
www.wika.co.nz

WIKa Alexander Wiegand SE & Co. KG

Alexander-Wiegand-Straße 30 · 63911 Klingenberg · Germany
Tel. +49 9372 132-0 · Fax +49 9372 132-406
info@wika.de · www.wika.de

